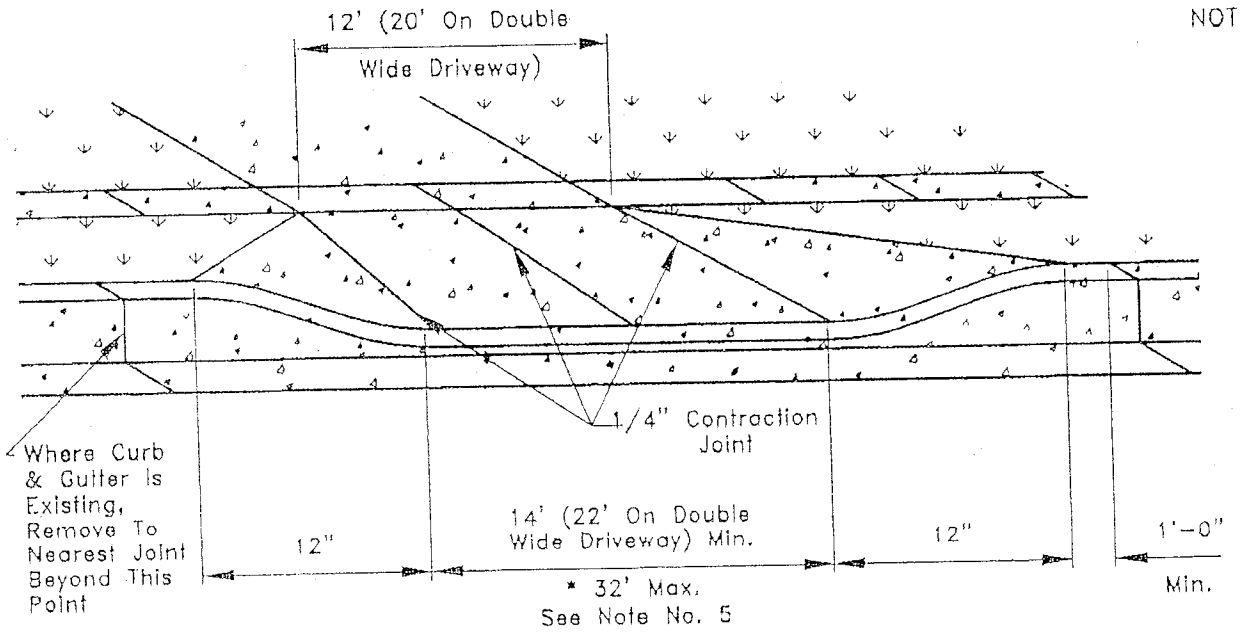

NOTES:

1. Score 1/4" Dummy Contraction Joints At 4'-0" Intervals.
2. Construct 1/2" Bituminous Expansion Joints At 20'-0" (Max.) Intervals.
3. Concrete Shall Be Sprayed With Liquid Curing Compound.
4. 12-1/2" To 15-1/2" See Electrical Details E-3 And E-4.
5. * 32' Maximum Width Is Subject To Approval On A Case By Case Basis And For Commercial Use.
6. Concrete To Be MSHA Mix No. 2.

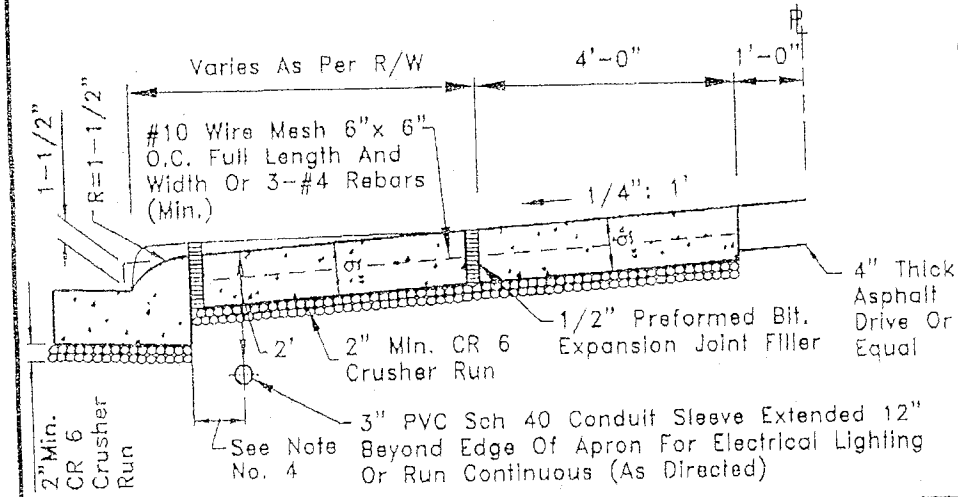

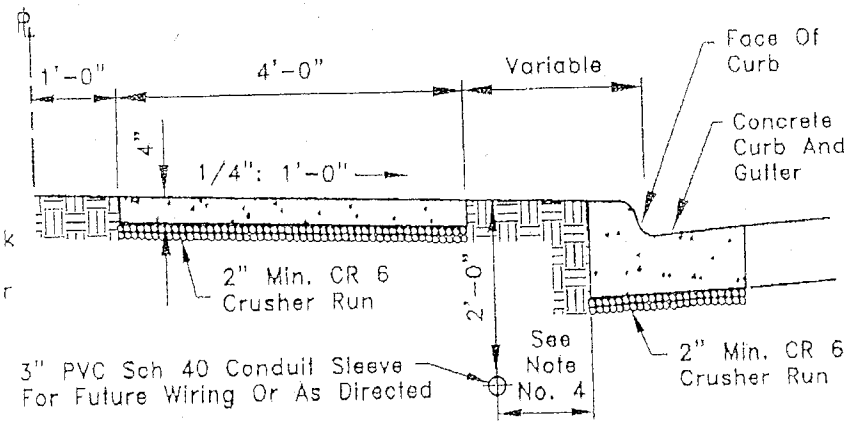

	SCALE: NONE	REVISIONS:		TYPICAL DRIVEWAY-CURB DETAIL AND TYPICAL SIDEWALK LOCATION FOR RESIDENTIAL AND COMMERCIAL ENTRANCES